

# INSTALLATION - FRAMING & FINISHING

FRAMING DIMENSIONS			
MODEL	WIDTH	DEPTH	HEIGHT
UE56-SLIM	56 1/2" (1435MM)	6" (152MM)	24 1/8" (612MM)
UE68-SLIM	68 1/2" (1740MM)		

Figure 6: Framing Dimensions

The overall size of the Uptown Slim models has been purposely made to fully recess the fireplace into a 2x6 framed wall.

1. Refer to the figures above and to the right for the required framing dimensions to fully recess the selected fireplace model.

\*Provide appropriate dedicated circuit for hard wire install at the top right of framed opening.

2. Remove the front finishing bezel.

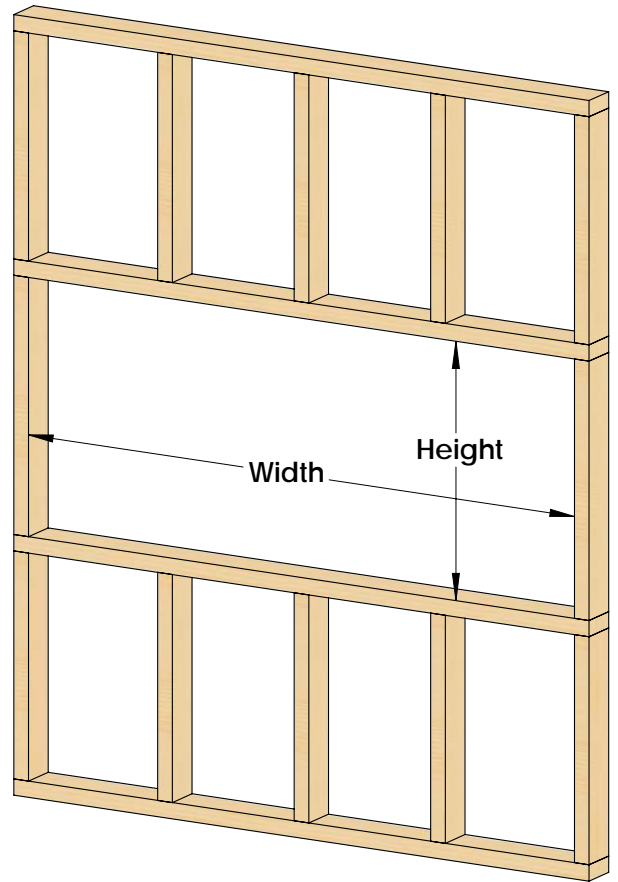


Figure 7: Framed Opening

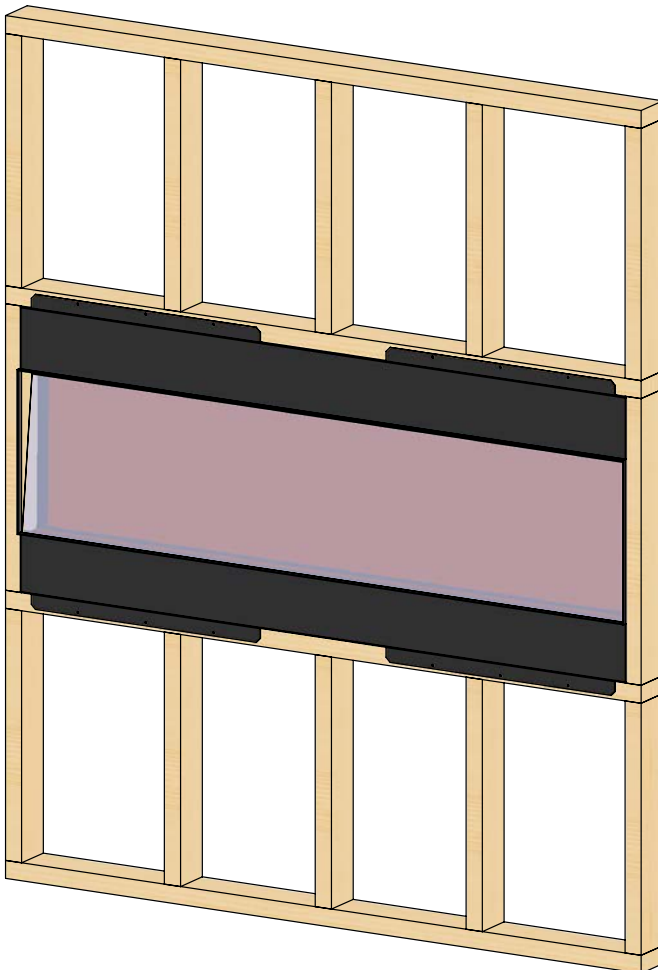


Figure 8: Fireplace Installed in Framed Opening

3. Install the four supplied mounting L-backets on the top and bottom of the fireplace.

4. Install the fireplace in the framed opening using minimum 1 1/4" long drywall screws to secure the unit.